

GTB™ ET GAS-TIGHT SUIT

CHLOROTEX



RESPIREX™

Description


The fully encapsulating GTB is a **Type 1A-ET** enhanced-robustness, reusable gas-tight suit covering both the wearer and breathing apparatus. The suit is manufactured from our new **ChloroTex** material, a high-performance laminate fabric with a CSM rubber inner and outer surface and an internal chemical barrier film.

The suit provides excellent chemical resistance in a comparatively lightweight but durable design.

Applications



Fire
Brigades



Health
Authorities




Civil
Defence




Water
Companies



Nuclear



Petro-
Chemical



Shipping



Pharma-
ceutical



Certification



TYPE 1A | EN 943-2:2019 (ET)
Gas-Tight Chemical Protective Suits
for Emergency Teams

Material Performance



EN 14126:2003
Protective Clothing Against Infective Agents

Product Documentation



The Declaration of Conformity and user instructions can all be downloaded from the product page on the Respirex website, links are in the downloads tab.

There are also additional photos and videos on donning procedure.

Key Features

Encapsulating design for **Self Contained Breathing Apparatus (SCBA)** worn inside the suit

Gas-tight zip running from side of head to lower thigh, covered by double zip flap with hook & loop fastener

Protection against liquid & gaseous chemicals (**Type 1**), infective agents and chemical warfare agents

Inward Leakage tested to **EN 1073-2:2002, Class 3** with an assigned Nominal Protection Factor (NPF) >9090

Gas-tight locking cuff system for changing gloves

Dual glove system consisting of a **Kemblok™ chemical barrier inner glove** bonded to an **outer neoprene glove** for mechanical protection.

Choice of **fixed or detachable chemical safety boots or sock feet** (see below)

Two exhalation valves maintain a comfortable working pressure inside the suit


Rigid chemically resistant double layer visor permitting clear undistorted vision and a wide field of view

Bat-wing sleeves allow wearer to remove their hand from the glove to check gauges and other equipment inside the suit

Adjustable **internal support belt**

Fifteen year shelf-life, with internal pressure test required annually or after each use

Internal pressure test to ISO 17491-1:2012 conducted prior to despatch to confirm the suit is gas-tight

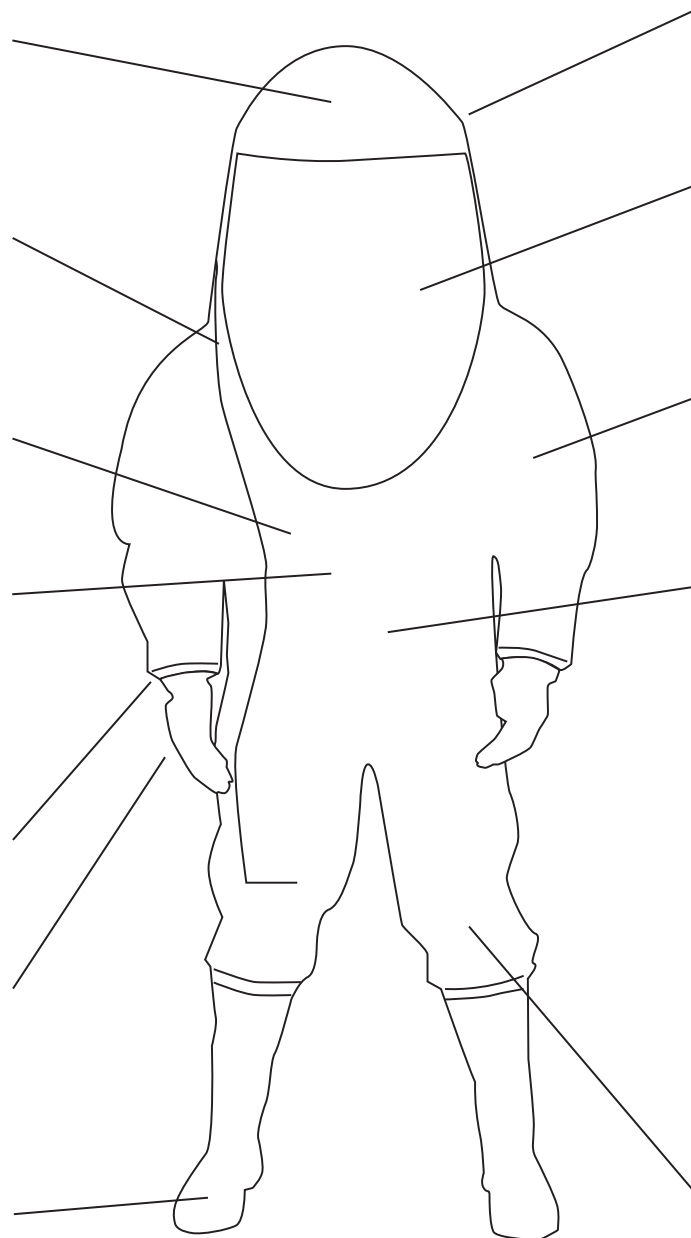

Foot or Boot Configuration



Sock Foot and Outer Leg

A sock foot of the suit fabric is fitted with an outer splash guard leg, allowing the use of customers own heat & flame resistant chemical safety boots (required as par of EN943-2). This also reduces pack size.



Detachable Boots

Detachable **Hazmax™ FPA** heat and flame resistant chemical safety boots are attached by a locking ring and can be replaced during suit servicing.



Fixed Boots

Hazmax™ FPA heat and flame resistant chemical safety boots are permanently attached to the suit. The suit needs to be returned to Respirex for boot replacement.

Suit Options



Fall Arrest

Fall arrest facility for use with an internal fall arrest harness with a back D ring fixing and used in conjunction with a retractable type fall arrester



Suit Ventilation (GTVB Model)

Adjustable ventilation system for the arms and legs of the suit, fed from the wearers BA set. Adjustable in steps from 0 to 100l/m from a control valve mounted on the chest.



Suit/Brigade ID

Customer Identification names & codes can be added to the base of the visor or on the back of the suit.



Pass-Through

Allows the connection of a second cylinder or an air-line to the second man attachment on the wearers breathing apparatus during decontamination.



Anchor Hook

External equipment attachment point



Personal Line Attachment

External equipment attachment point



DSU Attachment

External equipment attachment point for a Distress Signal Unit (DSU)



Torch Ring Attachment

External equipment attachment point

Accessories



Hazbag Containment Bag

A hazardous material containment bag manufactured from Chemprotex™ 300 material. Supplied with a cable tie, tag and wallet for sealing and identification. Dimensions: 1050 x 1370 mm



Gas-Tight Suit Test Unit -

Computer controlled test unit that automatically inflates a suit from a compressed air supply and performs an internal pressure test to ISO 17491-1:2012



Training Suit

A training version of the operational suit manufactured in green PVC and designed for multiple re-use with no testing required.




Manual Gas-Tight Suit Test Box

Operator controlled test unit that can be used to inflate a suit from a compressed air supply and perform an internal pressure test to ISO 17491-1:2012



Suit Care & Maintenance

A selection of suit care products including cleaning and deodorising agents, anti-fogging spray for visors and lubricating wax for zips.




Disposable Outer Visor

Tear-off outer visor held on by hook and loop pads. Provides additional mechanical and chemical protection.

Sizing Chart

Size	Chest (cm)	Height (cm)
X-Small	79-88	150-164
Small	88-96	164-170
Medium	96-104	170-176
Large	104-112	176-182
X-Large	112-124	182-188
XX-Large	124-136	188-194

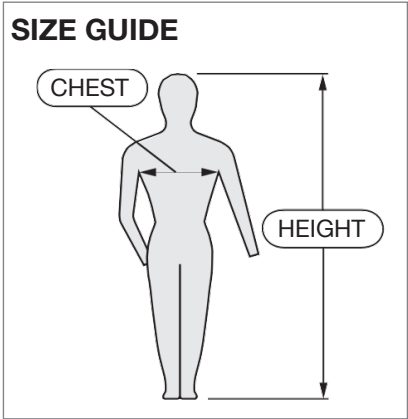

Sizing Chart

GTB CT Suit	
Pack Size (max)	60 x 41 x 41 cm (case)
Pack Weight (max)	12.7 kg
Carton Qty	1
Commodity Code	62104000

Specifications are based on an XL or XXL sized suit with boots but without optional accessories and are for guidance only

Material Properties

Tested In Accordance With	Performance Requirement	Level of Performance (CT)	Class (CT)	Min Class for EN 943-2
EN ISO 12947-2 (inc. pressure drop)	Abrasion Resistance	> 2,000 Cycles	6	6
Method B of EN ISO 7854 (inc. pressure drop)	Flex Cracking Resistance	> 50,000 Cycles	6	4
Method B of EN ISO 7854 at -30°C (inc. pressure drop)	Flex Cracking Resistance at Low Temperatures (-30°)	> 4,000 Cycles	6	2
EN ISO 9073-4	Trapezoidal Tear Resistance	> 40 N	3	3
EN 863	Puncture Resistance	> 50 N	3	3
EN ISO 13934-1	Tensile Strength	> 1,000 N	6	6
En ISO 13934-1	Seam Strength	> 500 N	6	5
Method 3 (modified) of EN 13274-4 (inc. pressure drop)	Resistance to Flame	No droplets, burning or holes	3	3

Material tested in accordance with Table 1 of EN943-2:2019 - Minimum performance requirements of chemical protective clothing materials for enhanced robustness suits.

Chemical Permeation

Chemical	Physical State	Breakthrough Time CT	Breakthrough Time Kemblok™ Glove	Breakthrough Time Visor	Breakthrough Time Suit Seams CT
Acetone 100%	Liquid	> 480 mins	> 480 mins	> 480 mins	> 480 mins
Acetonitrile 99.9%	Liquid	> 480 mins	> 480 mins	> 480 mins	> 480 mins
Ammonia 99.9%	Gas	> 480 mins	> 480 mins	> 480 mins	> 480 mins
Carbon Disulphide 99.9%	Liquid	> 480 mins	> 480 mins	> 480 mins	> 480 mins
Chlorine 99.5%	Gas	> 480 mins	> 480 mins	> 480 mins	> 480 mins
Dichloromethane 99.9%	Liquid	> 480 mins	> 480 mins	> 480 mins	> 480 mins
Diethylamine 99.5%	Liquid	> 480 mins	> 480 mins	> 480 mins	> 480 mins
Ethyl Acetate 99.7%	Liquid	> 480 mins	> 480 mins	> 480 mins	> 480 mins
n-Hexane 99%	Liquid	> 480 mins	> 480 mins	> 480 mins	> 480 mins
Hydrogen Chloride 99.9%	Gas	> 480 mins	> 480 mins	> 480 mins	> 480 mins
Methanol 99.9%	Liquid	> 480 mins	> 480 mins	> 480 mins	> 480 mins
Sodium Hydroxide 40%	Liquid	> 480 mins	> 480 mins	> 480 mins	> 480 mins
Sulphuric Acid 95-98%	Liquid	> 480 mins	> 480 mins	> 480 mins	> 480 mins
Tetrahydrofuran 99.9%	Liquid	> 480 mins	> 480 mins	> 480 mins	> 480 mins
Toluene 99.9%	Liquid	> 480 mins	> 480 mins	> 480 mins	> 480 mins

The test results indicate the resistance to permeation by chemicals of the material, seams, glove liner and suit visor as required by EN943-2:2019. All tests were carried out under laboratory conditions by independent accredited laboratories in accordance with BS EN ISO 6529 unless otherwise stated

For full details of the chemical permeation performance of ChloroTex and its performance against chemical warfare and infective agents, please visit the materials section of the Respirex website www.respirex.com.

Respirex™, GTB, Hazmax™ and Kemblok™ are registered trademarks of Respirex International Limited

Classification of permeation resistance

Breakthrough Time (mins)	Class
> 480	6
> 240	5
> 120	4
> 60	3
> 30	2



RESPIREX™

Living + Breathing Personal Protection

Respirex International Limited, Unit F Kingsfield Business Centre, Philanthropic Road, Redhill, Surrey, RH1 4DP, United Kingdom

🌐: www.respirex.com ☎: +44 (0)1737 778600 ✉: info@respirex.co.uk